

Luxury Vinyl Flooring

INSPIRED BY  Mission Collection



Cortona 12^{II}
THE BEVEL COLLECTION





Waterproof



Pet-Proof



Quiet

.....

**PREMIUM ENGINEERED
LUXURY VINYL FLOORING**
*Crafted With Innovative Technology
& Artistic Design*

.....



Kid Safe



Durable



Eco-Friendly

**SUPERIOR
CONSTRUCTION**

Durable UV Cured Finish

- Protects Against Excessive Wear
- Provides Easy Cleaning

Luxury Vinyl Décor Layer

- 100% Virgin Vinyl
- Durable & Resilient Hard Surface

WPC Core with Unilin Lock

- Eliminates Subfloor Telegraphing
- Easy Installation



**MODERN STYLES WITH
PAINTED BEVEL EDGES**

FEATURES

Broad Applications

Waterproof

Virgin Vinyl Décor Layer

Durable Ceramic Bead Finish

Unilin Locking System

Superior Construction

BENEFITS

> Multi-Family Residential & Light Traffic Commercial Area

> Can Be Installed in Bathrooms, Kitchens and Basements

> 100% Virgin & Safe For The Environment

> Scratch Resistant Hard Surface Flooring

> Easy Installation Without Using Nails, Staples or Glue

> Minimizes or Eliminates Telegraphing



Cortona 12 II vs Regular LVT

Our waterproof flooring is the winner in every category when compared to regular LVT.

	Cortona 12 II	Regular LVT
<i>Stability</i>	More Stable	Less Stable
<i>Movements At Challenging Temperatures</i>	Less	More
<i>Locking Mechanism Strength</i>	Stronger	Weaker
<i>Subfloor Imperfections</i>	Hidden	Shown
<i>Install Over Existing Floors</i>	Yes	No
<i>Suitable For Light Traffic Commercial Area</i>	Yes	Not Always
<i>Pet & Child Friendly</i>	Yes	Not Always
<i>Realistic Look, Feel & Sound</i>	Yes	Not Always

*This is just a general comparison between Cortona 12 II and regular LVT. Use only as a reference.





NEW





NEW



NEW





REDONDO

NEW





NEW





NEW





NEW





NEW





NEW





NEW





NEW





NEW





















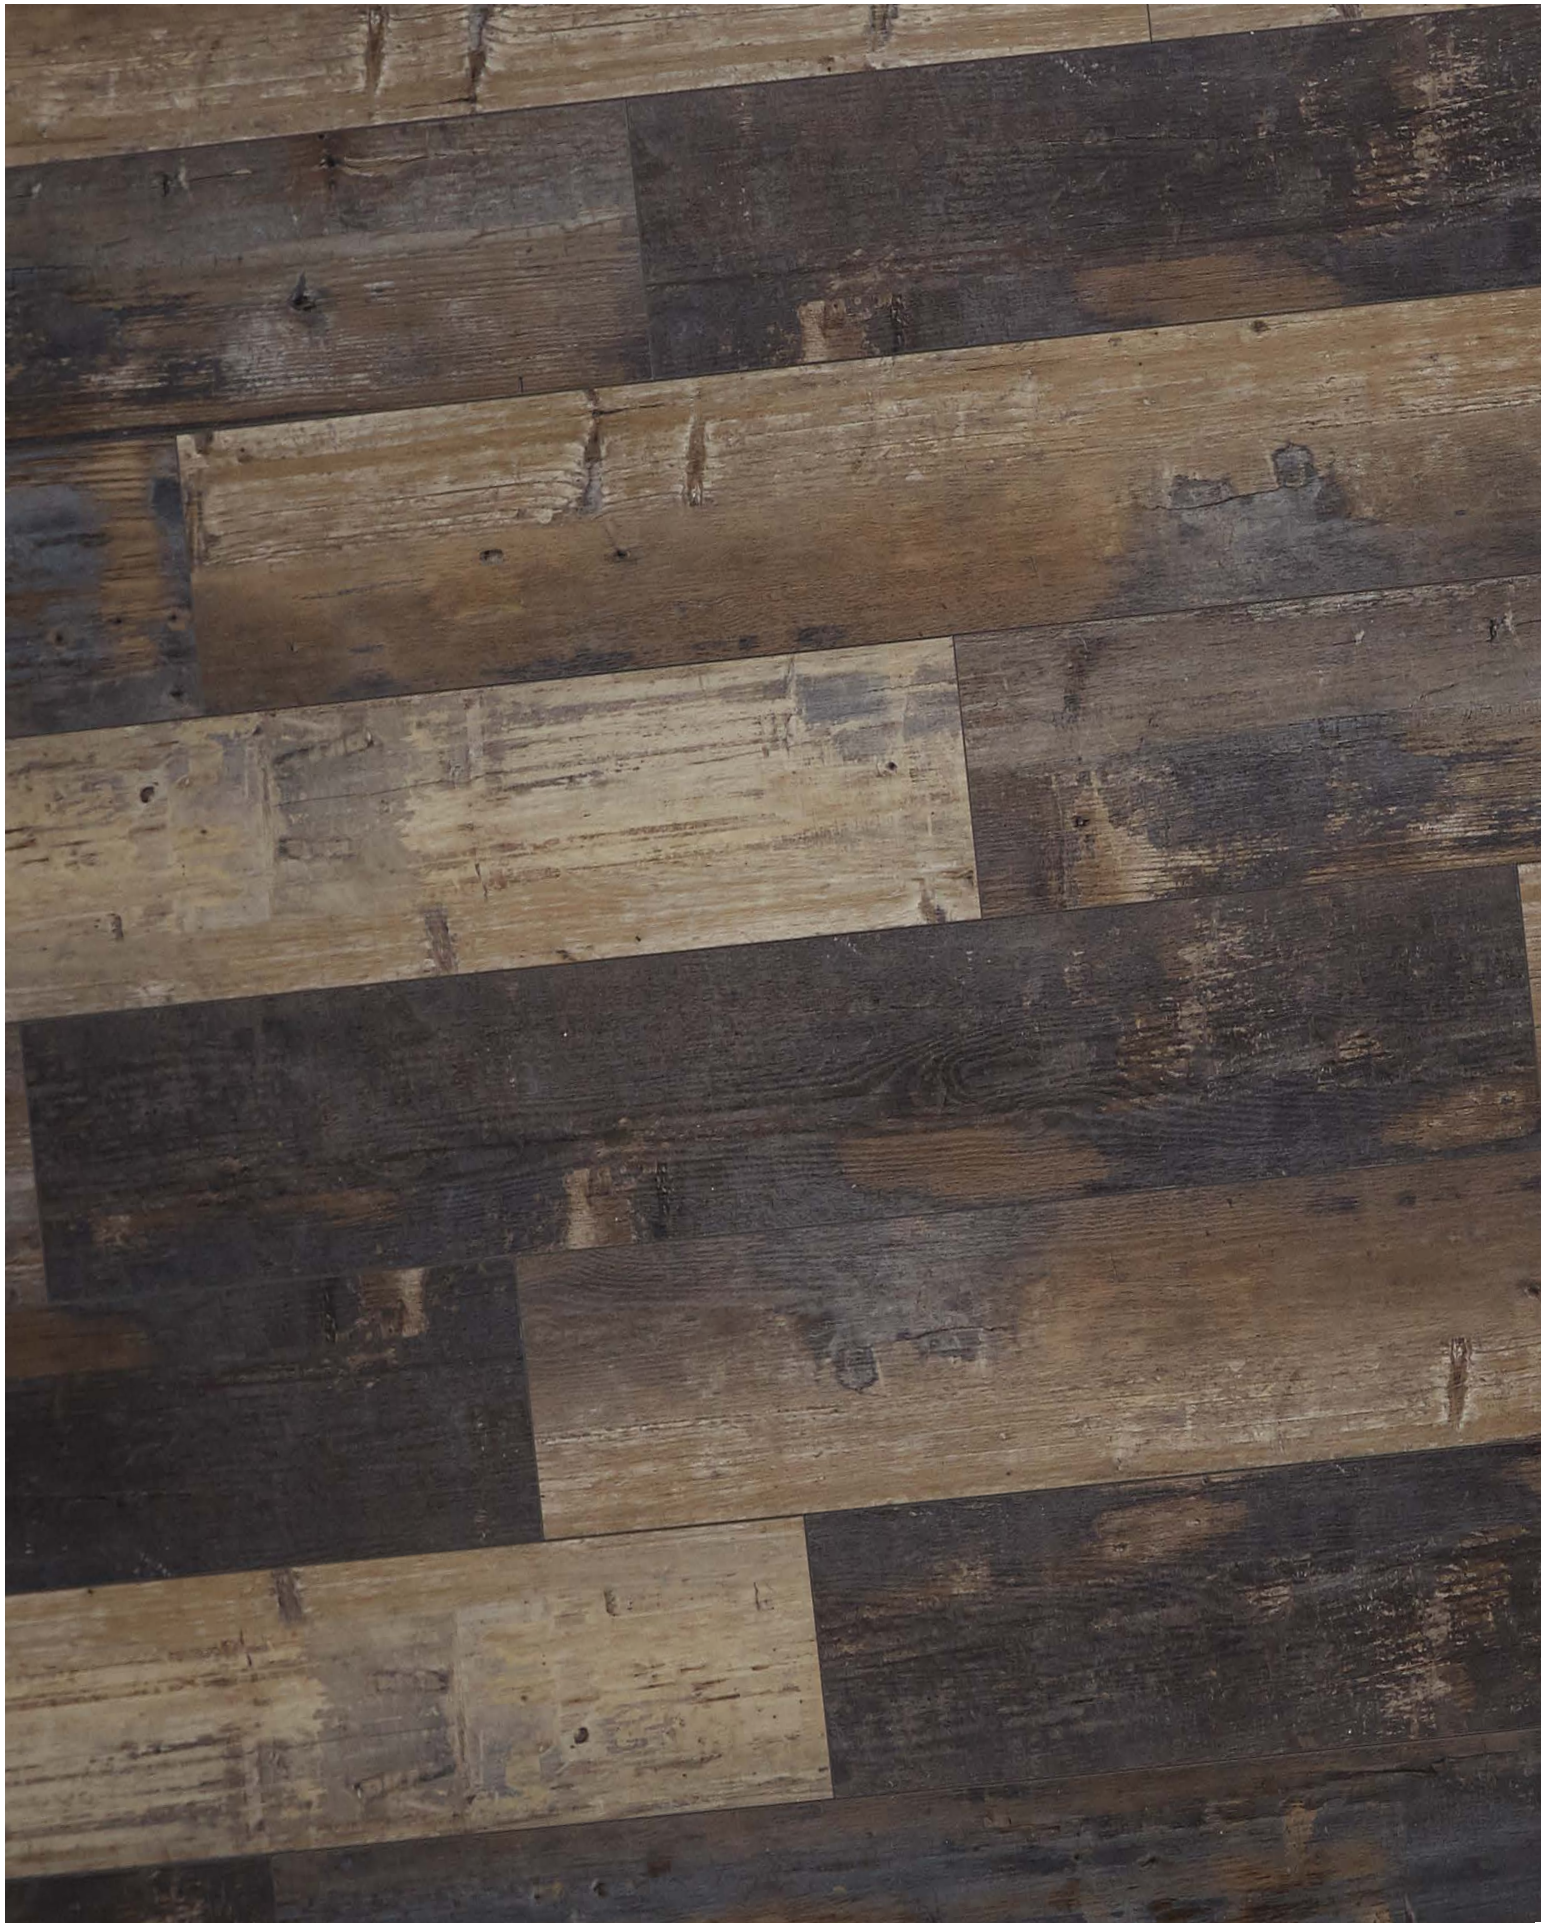



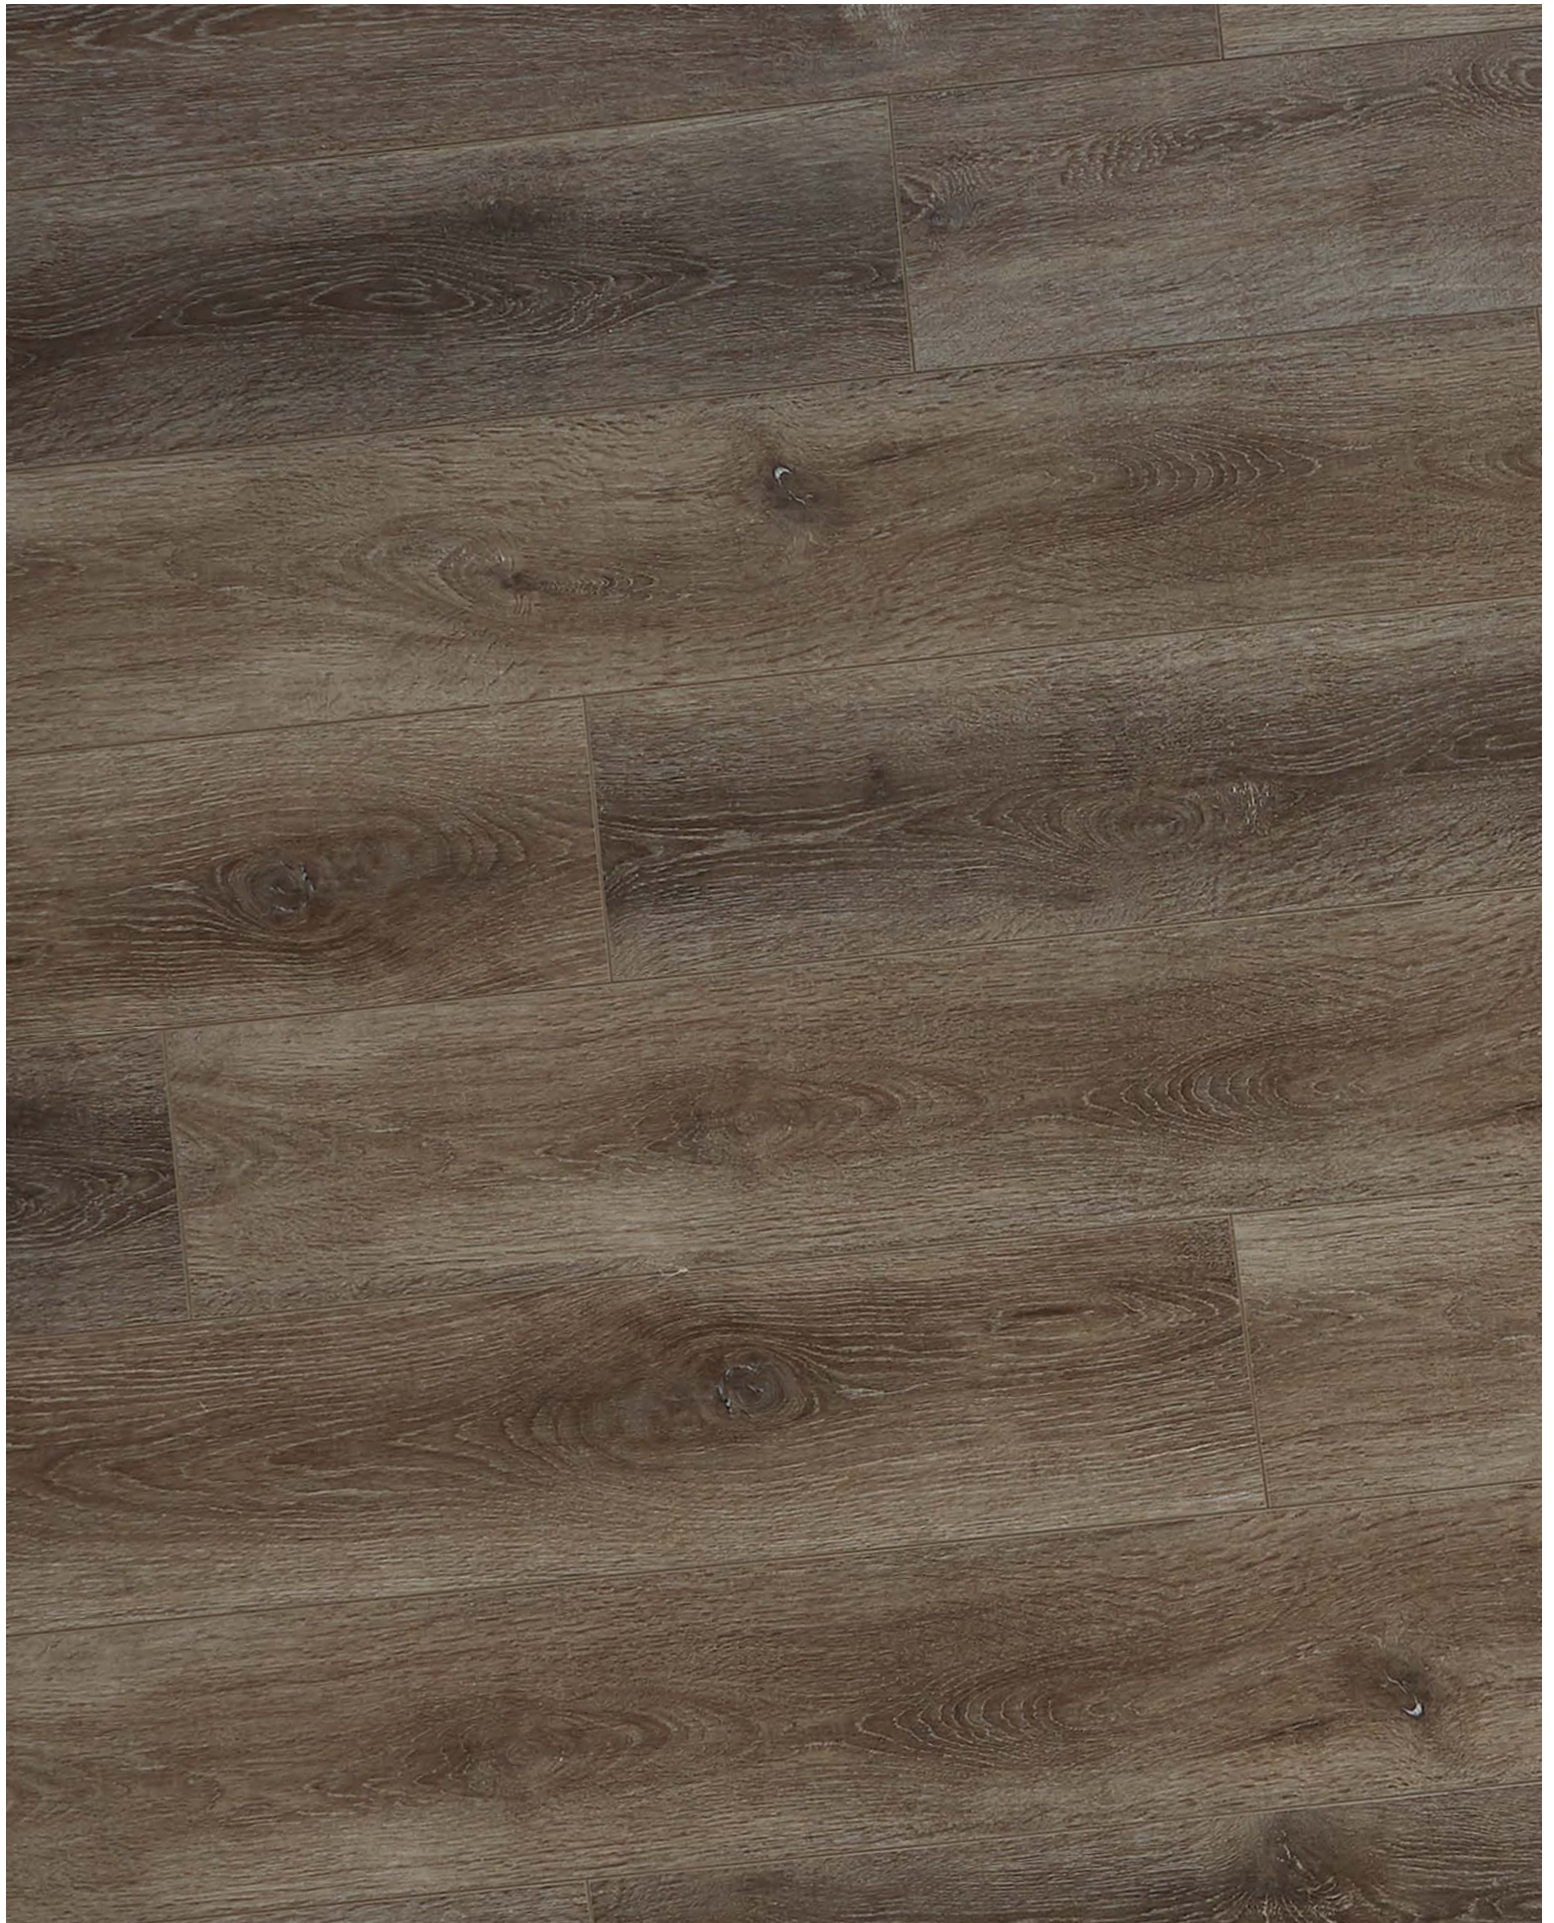





TROMPAS




TECHNICAL SPECIFICATIONS

Width:	7 Inches
Length:	48 Inches
Thickness:	.26 Inches (6.5mm)
Visual:	European Oak Hardwood Style
SF/Ctn:	23.5 Square Feet Per Carton
Installation:	Float - Patented Uniclic® System <ul style="list-style-type: none">• Above Grade• On Grade• Below Grade
Residential Maintenance:	Damp mop with a neutral floor cleaner followed by rinsing with clean water when floor has become too dirty for spot cleaning. See maintenance sheet for full instructions.
Construction:	12 mil wear layer 1.5 mm virgin PVC surface, 5.0mm core
Warranty:	30 year residential 10 year light commercial

CERTIFICATIONS



Deutsches
Institut
für
Bautechnik



Uniclic® is the patented locking system of Unilin which allows installation without the need for any nails, staples or glue. Planks are connected securely together to minimize or eliminate suboor telegraphing.



TESTING DATA

EN 13501-1 Reaction to Fire	Bf1-s1
ASTM E492-2009 Impact Sound Conduction	IIC 55 db
ASTM E-2179 Impact Sound of Underlayment	Delta IIC 22 db
ASTM E90-09 Airborne Sound Conduction	STC 55 db
NALFA-01 3.2 Thickness Swell	Class 4, Commercial
NALFA 3.3 Xenon Light Resistance	Class 4, Commercial
NALFA 3.4 Cleanability-Stain Resistance	Class 4, Commercial
NALFA 3.5 Large Ball Impact Resistance	Class 4, Commercial
NALFA 3.6 Small Ball Impact Resistance	Class 4, Commercial
ASTM F 2055 Dimensional Tolerance	Class 4, Commercial
NALFA 3.9 Caster Chair	Commercial Moderate
NALFA 3.10 Surface Bonding	1.31 N/mm - Exceeds Class 3 Commercial Requirement
EN 13893 Static Coefficient of Friction	0.42 (slip resistance)
ASTM F-970-07 Static Load Limit	0.004 inch - Passes at 250 psi
ASTM-F2753 Rolling Load Over Resilient FC	0.024
ASTM F 1514 Color Resistance to Heat	Meets <8.0 Delta E Requirement
ISO 105 B02 Color Resistance to Light	Meets <8.0 Delta E Requirement

Cortona 12^{II}
THE BEVEL COLLECTION

Distributed by B.R. Funsten Company
For additional information please visit: www.themissioncollection.com

DISCLAIMER: Room scenes and product shots are intended as visual guides and not as the actual representation of the floors.
Before you install any flooring product, we recommend that you rack out a box or two to verify that the product you have ordered is the actual color that you want.